

1 Read Carefully Initials Required

MEASUREMENTS: Use a dial caliper to measure bushings and follow measuring instructions for springs. Parts will be built / fabricated to your specs and you will be charged for any custom part replacements due to inaccurate measurements.

NOTE: MAY REQUIRE ADDITIONAL MODIFICATIONS DURING INSTALLATION.

INITIALS

2 Contact Information

PLEASE PRINT CLEARLY

DATE

NAME

E-MAIL


PHONE

VEHICLE YEAR


VEHICLE MODEL

3 Select Profile


PLEASE CHECK ONE



2 HOLE



3 HOLE



MONSTER

4 Front Spring Eye

Viewed from the side:

Standard



Center




Reverse





5 Measure Front Spring Length and Width

INSTRUCTIONS: Cut two pieces of string, one 6" and one 4" in length. Tape 6" string to center eyebolt of the front spring eye. Tape 4" string to center bottom of the axle tube. Measure from bottom of both springs with truck at rest.

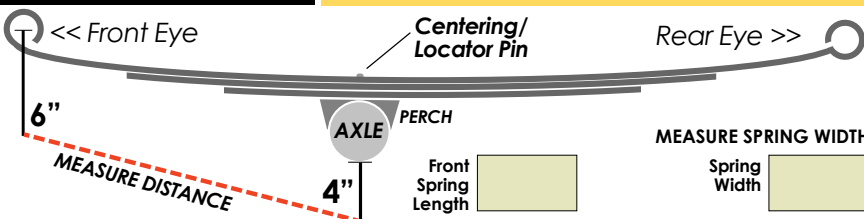

FOLLOW INSTRUCTIONS for accurate measurements

6 Measure Front Bushings - Inner and Outer Dimensions

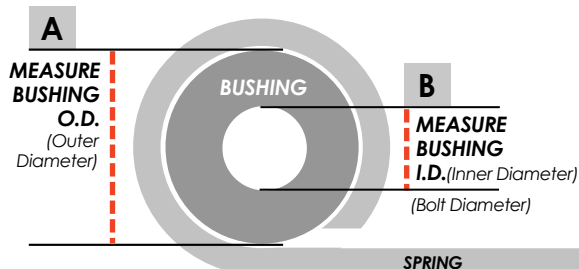

NOTE: Length of bushing is same as inside width of mounting hanger

IMPORTANT: FOR PRECISE RESULTS, MEASURE WITH DIAL CALIPERS

A O.D.


B I.D.

C Bushing Length

7 Leafspring Location


CHECK ONE

Springs ABOVE Axle



Springs BELOW Axle

8 Rear End Dimensions

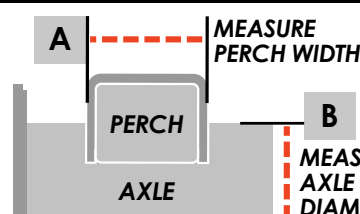


A Perch Width:


B Axle Diameter:

office use only

9 Check Shock Mount Location

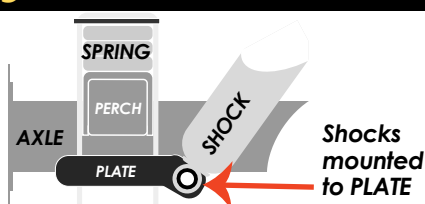

Shocks mounted to PLATE

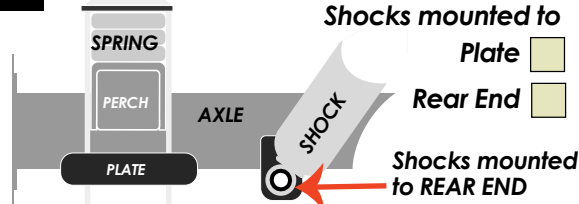

Shocks mounted to REAR END


PLEASE CHECK ONE:
Shocks mounted to

Plate

Rear End

10 Verify Shock Location (if mounted to Plate)

TOP VIEW

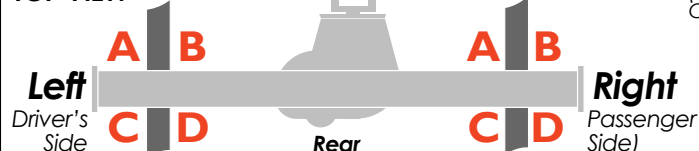


Shock Location: (A, B, C, or D)

Left (A, B, C, D)

Right (A, B, C, D)


office use only

11 U-Bolt Type / Length



Measure spring plate to axle, straight down, then add 2". See graphic

U-Bolt Length:



Check U-Bolt Type

Round

Squared